


# STAGE LDSISP02.6ST

LED SCREENS FOR STAGE,  
EVENT AND RENTAL  
INDUSTRIES



- Quick maintenance within 20 seconds
- One man installation with magnet on top panel design
- Aluminum structure with passive cooling and fanless design
- Reinforced module structure suitable for continuous disassembly and installation
- Production level calibration for best color uniformity
- All models have 500x500mm panel options
- Strong structure supporting +10 and -10 degree curving
- 45 degree Cut Corner panel for all pixel pitches
- Creative design installation

## OUTDOOR EVENT PARIS / FRANCE

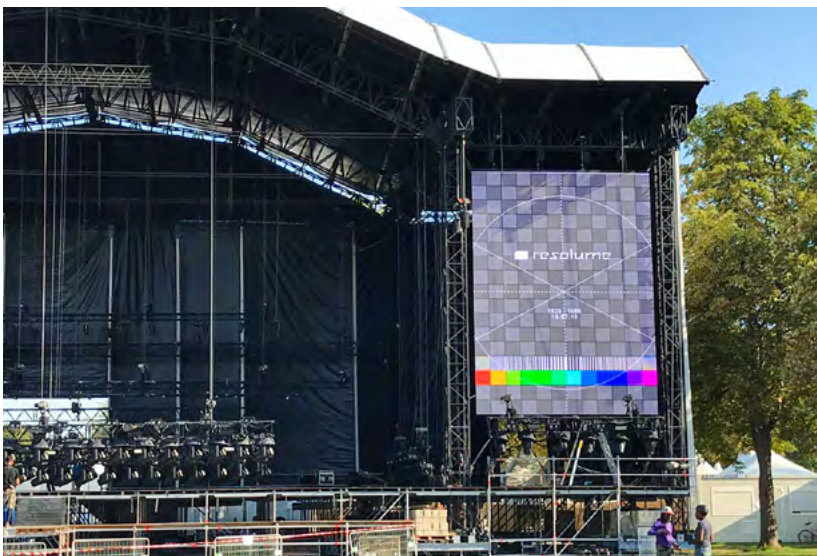

### General

Operating environment	indoor
Pixel pitch	2,6mm
Service type	rear&front access
Calibrated brightness (nits)	>800nits
Lamp type	SMD
Lifespan (hours at %50 brightness)	>100.000hours
White color calibration (adj.)	3.500K~8.500K
Gray scale	>16bits
Brightness control	256 level

### Module Specifications

Module dimensions (mm)	250x250
Refresh frequency	3.840Hz
Module resolution	96x96px
LED drive method	dynamic
Module material	plastic (PC)
Module type	sealed
PCB type	multilayer
PCB surface coating	humiseal

### Panel Specifications

Panel material	die-casting aluminum
Panel paint	ES powder coated
Panel dimensions (mm) <sup>1</sup>	500*500
IP level	IP30 front and rear
Panel weight	7,9kg
Panel resolution	192x192px
Pixel density (pcs/sqm)	147.456px
Curve angle	+/-10
Viewing angle (horizontal x vertical)	>120° x 120°
Minimum viewing distance	>3m
Operating temperature range	0°C ~ +50°C
Storage temperature range	-20°C ~ +60°C
Operating humidity	10% ~ 90% non-condensing
Power input voltage	110 ~ 240 VAC
Power input frequency	50 ~ 60 Hz
Average power per sqm	<120W
Max power per sqm	<600W
Active PFC	YES
Load tolerance <sup>2</sup>	25% min.
Panel installation type	Rental type
Cooling	Passive cooling


### Other

Max input resolution	FHD, UHD, 4K, 8K
Standard video sources <sup>3</sup>	All digital formats
Brightness adjustment	Manual
Death pixel monitoring	Optional
Module monitoring	YES
Temperature monitoring	YES
Smoke monitoring	Optional
Voltage monitoring	YES
Power redundancy	N/A
Signal path backup	YES
Signal transmission	CAT or Fiber Optic
Standby scheduling	YES
Power on/off scheduling	Optional
Power saving mode	N/A
Certification	CE-EMC, CE-LVD, RoHS, FCC

### Options

\*The mechanical and electronic specification options are available.

- 1- Panel dimensions can change upon customer request  
 2- That value is the remain capacity of PSU's at 100% brightness and white color content  
 3- Different types of video input available as option

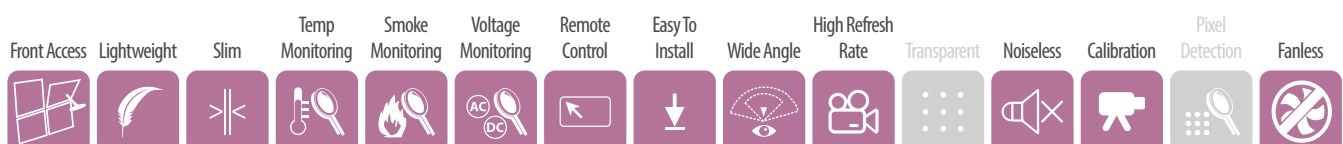

Apron Teknoloji AS. reserves the right to change any product specification, discontinue of any product or services without prior notice

# STAGE LDSISP02.9ST

LED SCREENS FOR STAGE,  
EVENT AND RENTAL  
INDUSTRIES



- Quick maintenance within 20 seconds
- One man installation with magnet on top panel design
- Aluminum structure with passive cooling and fanless design
- Reinforced module structure suitable for continuous disassembly and installation
- Production level calibration for best color uniformity
- All models have 500x500mm panel options
- Strong structure supporting +10 and -10 degree curving
- 45 degree Cut Corner panel for all pixel pitches
- Creative design installation

JOY FORUM  
RIYADH / KSA



## General

Operating environment	indoor
Pixel pitch	2.9mm
Service type	rear&front access
Calibrated brightness (nits)	>800nits
Lamp type	SMD
Lifespan (hours at %50 brightness)	>100,000hours
White color calibration (adj.)	3,500K~8,500K
Gray scale	>16bits
Brightness control	256 level

## Module Specifications

Module dimensions (mm)	250x250
Refresh frequency	3,840Hz
Module resolution	84x84px
LED drive method	dynamic
Module material	plastic (PC)
Module type	sealed
PCB type	multilayer
PCB surface coating	humiseal

## Panel Specifications

Panel material	die-casting aluminum
Panel paint	ES powder coated
Panel dimensions (mm) <sup>1</sup>	500x500 & 500x1,000
IP level	IP30 front and rear
Panel weight	7,9kg & 13kg
Panel resolution	172x172px & 172x344px
Pixel density (pcs/sqm)	118,336px
Curve angle	+/-10
Viewing angle (horizontal x vertical)	>120° x 120°
Minimum viewing distance	>3m
Operating temperature range	0°C ~ +50°C
Storage temperature range	-20°C ~ +60°C
Operating humidity	10% ~ 90% non-condensing
Power input voltage	110 ~ 240 VAC
Power input frequency	50 ~ 60 Hz
Average power per sqm	<120W
Max power per sqm	<600W
Active PFC	YES
Load tolerance <sup>2</sup>	25% min.
Panel installation type	Rental type
Cooling	Passive cooling


## Other

Max input resolution	FHD, UHD, 4K, 8K
Standard video sources <sup>3</sup>	All digital formats
Brightness adjustment	Manual
Death pixel monitoring	Optional
Module monitoring	YES
Temperature monitoring	YES
Smoke monitoring	Optional
Voltage monitoring	YES
Power redundancy	N/A
Signal path backup	YES
Signal transmission	CAT or Fiber Optic
Standby scheduling	YES
Power on/off scheduling	Optional
Power saving mode	N/A
Certification	CE-EMC, CE-LVD, RoHS, FCC

## Options

\*The mechanical and electronic specification options are available.

- 1- Panel dimensions can change upon customer request  
 2- That value is the remain capacity of PSU's at 100% brightness and white color content  
 3- Different types of video input available as option

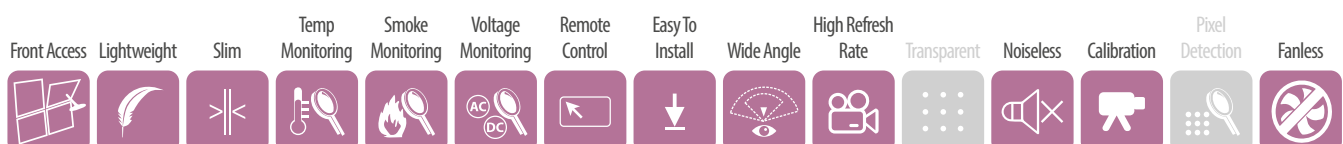

Apron Teknoloji AS. reserves the right to change any product specification, discontinue of any product or services without prior notice

TECHNICAL SPECIFICATIONS

LEDECA



# STAGE LDSISP03.9ST

LED SCREENS FOR STAGE,  
EVENT AND RENTAL  
INDUSTRIES



- Quick maintenance within 20 seconds
- One man installation with magnet on top panel design
- Aluminum structure with passive cooling and fanless design
- Reinforced module structure suitable for continuous disassembly and installation
- Production level calibration for best color uniformity
- All models have 500x500mm panel options
- Strong structure supporting +10 and -10 degree curving
- 45 degree Cut Corner panel for all pixel pitches
- Creative design installation

**OPET TRUCK**  
ISTANBUL / TURKEY



## General

Operating environment	indoor
Pixel pitch	3.9mm
Service type	rear&front access
Calibrated brightness (nits)	>800nits
Lamp type	SMD
Lifespan (hours at %50 brightness)	>100.000hours
White color calibration (adj.)	3.500K~8.500K
Gray scale	>16bits
Brightness control	256 level

## Module Specifications

Module dimensions (mm)	250x250
Refresh frequency	3.840Hz
Module resolution	64x64px
LED drive method	dynamic
Module material	plastic (PC)
Module type	sealed
PCB type	multilayer
PCB surface coating	humiseal

## Panel Specifications

Panel material	die-casting aluminum
Panel paint	ES powder coated
Panel dimensions (mm) <sup>1</sup>	500x500 & 500x1.000
IP level	IP30 front and rear
Panel weight	7,9kg & 13kg
Panel resolution	128x128px & 128x256
Pixel density (pcs/sqm)	65.536px
Curve angle	+/-10
Viewing angle (horizontal x vertical)	>120° x 120°
Minimum viewing distance	>4m
Operating temperature range	0°C ~ +50°C
Storage temperature range	-20°C ~ +60°C
Operating humidity	10% ~ 90% non-condensing
Power input voltage	110 ~ 240 VAC
Power input frequency	50 ~ 60 Hz
Average power per sqm	<120W
Max power per sqm	<600W
Active PFC	YES
Load tolerance <sup>2</sup>	25% min.
Panel installation type	Rental type
Cooling	Passive cooling

## Other

Max input resolution	FHD, UHD, 4K, 8K
Standard video sources <sup>3</sup>	All digital formats
Brightness adjustment	Manual
Death pixel monitoring	Optional
Module monitoring	YES
Temperature monitoring	YES
Smoke monitoring	Optional
Voltage monitoring	YES
Power redundancy	N/A
Signal path backup	YES
Signal transmission	CAT or Fiber Optic
Standby scheduling	YES
Power on/off scheduling	Optional
Power saving mode	N/A
Certification	CE-EMC, CE-LVD, RoHS, FCC

## Options

\*The mechanical and electronic specification options are available.

1- Panel dimensions can change upon customer request

2- That value is the remain capacity of PSU's at 100% brightness and white color content

3- Different types of video input available as option



Apron Teknoloji AS. reserves the right to change any product specification, discontinue of any product or services without prior notice

TECHNICAL SPECIFICATIONS

LEDECA

# STAGE LDSOSP03.9ST

LED SCREENS FOR STAGE,  
EVENT AND RENTAL  
INDUSTRIES



- Quick maintenance within 20 seconds
- One man installation with magnet on top panel design
- Aluminum structure with passive cooling and fanless design
- Reinforced module structure suitable for continuous disassembly and installation
- Production level calibration for best color uniformity
- All models have 500x500mm panel options
- Strong structure supporting +10 and -10 degree curving
- 45 degree Cut Corner panel for all pixel pitches
- Creative design installation

## INDOOR EVENT ISTANBUL / TURKEY



### General

Operating environment	outdoor
Pixel pitch	3.9mm
Service type	rear&front access
Calibrated brightness (nits)	4,500nits
Lamp type	SMD
Lifespan (hours at %50 brightness)	>100,000hours
White color calibration (adj.)	3,500K~8,500K
Gray scale	>16bits
Brightness control	256 level

### Module Specifications

Module dimensions (mm)	250x250
Refresh frequency	3,840Hz
Module resolution	64x64px
LED drive method	dynamic
Module material	plastic (PC)
Module type	sealed
PCB type	multilayer
PCB surface coating	humiseal

### Panel Specifications

Panel material	die-casting aluminum
Panel paint	ES powder coated
Panel dimensions (mm) <sup>1</sup>	500x500 & 500x1,000
IP level	IP65 front and IP54 rear
Panel weight	8,5kg & 13,9kg
Panel resolution	128x128px & 128x256
Pixel density (pcs/sqm)	65536px
Curve angle	+/-10
Viewing angle (horizontal x vertical)	>120° x 120°
Minimum viewing distance	>4m
Operating temperature range	-15°C ~ +50°C
Storage temperature range	-20°C ~ +60°C
Operating humidity	10% ~ 90% non-condensing
Power input voltage	110 ~ 240 VAC
Power input frequency	50 ~ 60 Hz
Average power per sqm	<120W
Max power per sqm	<600W
Active PFC	YES
Load tolerance <sup>2</sup>	25% min.
Panel installation type	Rental type
Cooling	Passive cooling

### Other

Max input resolution	FHD, UHD, 4K, 8K
Standard video sources <sup>3</sup>	All digital formats
Brightness adjustment	Manual
Death pixel monitoring	Optional
Module monitoring	YES
Temperature monitoring	YES
Smoke monitoring	Optional
Voltage monitoring	YES
Power redundancy	N/A
Signal path backup	YES
Signal transmission	CAT or Fiber Optic
Standby scheduling	YES
Power on/off scheduling	Optional
Power saving mode	N/A
Certification	CE-EMC, CE-LVD, RoHS, FCC

### Options

\*The mechanical and electronic specification options are available.

- 1- Panel dimensions can change upon customer request  
 2- That value is the remain capacity of PSU's at 100% brightness and white color content  
 3- Different types of video input available as option



Apron Teknoloji AS. reserves the right to change any product specification, discontinue of any product or services without prior notice



# STAGE LDSOSP04.8ST

LED SCREENS FOR STAGE,  
EVENT AND RENTAL  
INDUSTRIES



- Quick maintenance within 20 seconds
- One man installation with magnet on top panel design
- Aluminum structure with passive cooling and fanless design
- Reinforced module structure suitable for continuous disassembly and installation
- Production level calibration for best color uniformity
- All models have 500x500mm panel options
- Strong structure supporting +10 and -10 degree curving
- 45 degree Cut Corner panel for all pixel pitches
- Creative design installation

## INDOOR EVENT ISTANBUL / TURKEY



### General

Operating environment	indoor
Pixel pitch	2,6mm
Service type	rear&front access
Calibrated brightness (nits)	>800nits
Lamp type	SMD
Lifespan (hours at %50 brightness)	>100.000hours
White color calibration (adj.)	3.500K~8.500K
Gray scale	>16bits
Brightness control	256 level

### Module Specifications

Module dimensions (mm)	250x250
Refresh frequency	3.840Hz
Module resolution	96x96px
LED drive method	dynamic
Module material	plastic (PC)
Module type	sealed
PCB type	multilayer
PCB surface coating	humiseal

### Panel Specifications

Panel material	die-casting aluminum
Panel paint	ES powder coated
Panel dimensions (mm) <sup>1</sup>	500*500
IP level	IP30 front and rear
Panel weight	7,9kg
Panel resolution	192x192px
Pixel density (pcs/sqm)	147.456px
Curve angle	+/-10
Viewing angle (horizontal x vertical)	>120° x 120°
Minimum viewing distance	>3m
Operating temperature range	0°C ~ +50°C
Storage temperature range	-20°C ~ +60°C
Operating humidity	10% ~ 90% non-condensing
Power input voltage	110 ~ 240 VAC
Power input frequency	50 ~ 60 Hz
Average power per sqm	<120W
Max power per sqm	<600W
Active PFC	YES
Load tolerance <sup>2</sup>	25% min.
Panel installation type	Rental type
Cooling	Passive cooling

### Other

Max input resolution	FHD, UHD, 4K, 8K
Standard video sources <sup>3</sup>	All digital formats
Brightness adjustment	Manual
Death pixel monitoring	Optional
Module monitoring	YES
Temperature monitoring	YES
Smoke monitoring	Optional
Voltage monitoring	YES
Power redundancy	N/A
Signal path backup	YES
Signal transmission	CAT or Fiber Optic
Standby scheduling	YES
Power on/off scheduling	Optional
Power saving mode	N/A
Certification	CE-EMC, CE-LVD, RoHS, FCC

### Options

\*The mechanical and electronic specification options are available.

- 1- Panel dimensions can change upon customer request  
 2- That value is the remain capacity of PSU's at 100% brightness and white color content  
 3- Different types of video input available as option



Apron Teknoloji AS. reserves the right to change any product specification, discontinue of any product or services without prior notice